Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Ceiling Light

Supplier's address: Zhongshan Zhaoliang Lighting Co., Ltd., 7/F, No. 30 Qingji Street, Tiebian Vil-

lage, Henglan Town, Zhongshan City, China

Model identifier: 30903905

_	•		
Typa	Λt	liaht	source:
IVDE	VI.	IIGIIL	source.

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	Connec-		
(or other electric interface)	tion by wire		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


Product parameters

		1 Todact para				
Parameter		Value	Parameter	Value		
General product parameters:						
	mption in on- 00 h), rounded st integer	45	Energy efficiency class	E		
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		5 000 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000		
On-mode power (P _{on}), expressed in W		45,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	80	Spectral power dis-	See image		
sions without	Width	470	tribution in the	in last page		
separate con- trol gear, light-	Depth	470	range 250 nm to 800 nm, at full-load			

ing control parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power ^(a)		-	If yes, equivalent power (W)	-		
			Chromaticity coordi-	0,440		
			nates (x and y)	0,403		
Parameters for LED and OLED light sources:						
R9 colour rendering index value		2	Survival factor	0,90		
the lumen maintenance factor		0,96				
Parameters for	Parameters for LED and OLED mains light sources:					
displacement fa	ctor (cos φ1)	1,00	Colour consistency in McAdam ellipses	6		
Claims that an I replaces a flu source without last of a particul	orescent light integrated bal-	_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (P	st LM)	1,0	Stroboscopic effect metric (SVM)	0,9		

(a)_{'-'} : not applicable;

(b)_{'-'} : not applicable;

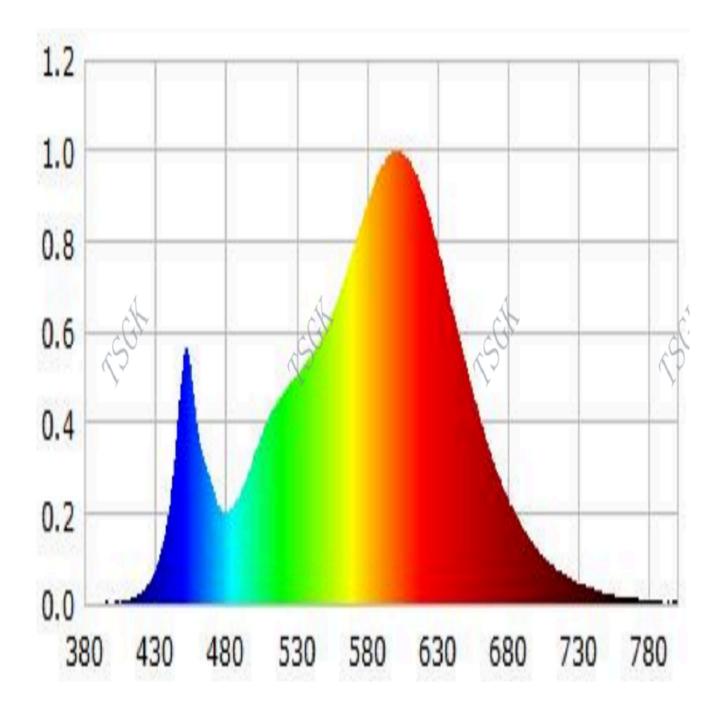

Model placed on the Union market from 04/11/2021



EPREL registration number: 1235484 https://eprel.ec.europa.eu/qr/12

35484

Supplier: StoneX Trading (Authorised representative) Website: https://goecolighting.fr/

Customer care service:

Name: Zhongshan Zhaoliang Lighting Co., Ltd. Website:

Email: goecolightingfr@163.com Phone: +447845991423

Address:

7/F, No. 30 Qingji Street, Tiebian Village, Henglan Town, Zhongshan

City, China