Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Ceiling Light

Supplier's address: Zhongshan Zhaoliang Lighting Co., Ltd., 7/F, No. 30 Qingji Street, Tiebian Vil-

lage, Henglan Town, Zhongshan City, China

Model identifier: 30839716

Type	of I	ight	sour	ce:
------	------	------	------	-----


Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	Connec-		
(or other electric interface)	tion by wire		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters					
Parameter		Value	Parameter	Value	
General product parameters:					
Energy consur mode (kWh/10 up to the neare	00 h), rounded	36	Energy efficiency class	E	
dicating if it refe a sphere (360º)	s flux (фuse), ineers to the flux in, in a wide cone arrow cone (90º)	4 000 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000	
On-mode pow pressed in W	ver (P _{on}), ex-	36,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00	
Networked standby power (P _{net}) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80	
Outer dimen-	Height	90	Spectral power dis-	See image	
sions without	Width	520	tribution in the	in last page	
separate control gear, light-	Depth	520	range 250 nm to 800 nm, at full-load		

ing control parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^{(a}	-	If yes, equivalent power (W)	-	
		Chromaticity coordi-	0,440	
		nates (x and y)	0,403	
Parameters for LED and OL	ED light sources:			
R9 colour rendering index va	alue 1	Survival factor	0,90	
the lumen maintenance fac	tor 0,96			
Parameters for LED and OLED mains light sources:				
displacement factor (cos φ1) 1,00	Colour consistency in McAdam ellipses	6	
Claims that an LED light sor replaces a fluorescent I source without integrated last of a particular wattage.	ight	If yes then replace- ment claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,9	

(a)_{'-'} : not applicable;

(b)_{'-'} : not applicable;

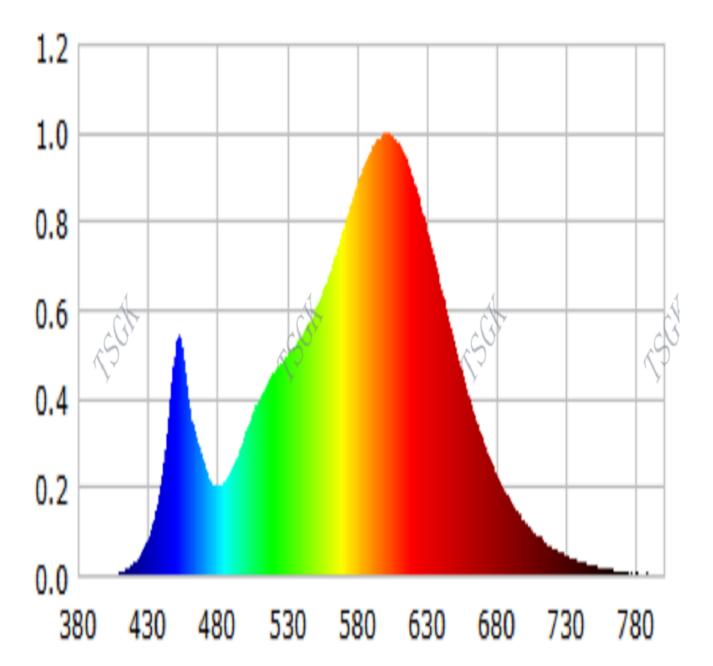

Model placed on the Union market from 11/05/2023



EPREL registration number: 1586141 https://eprel.ec.europa.eu/qr/15

86141

Supplier: StoneX Trading (Authorised representative) Website: https://goecolighting.fr/

Customer care service:

Name: Zhongshan Zhaoliang Lighting Co., Ltd. Website:

Email: goecolightingfr@163.com Phone: +447845991423

Address:

7/F, No. 30 Qingji Street, Tiebian Village, Henglan Town, Zhongshan

City, China