## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Ceiling Light

Supplier's address: Zhongshan Zhaoliang Lighting Co., Ltd., 7/F, No. 30 Qingji Street, Tiebian Vil-

lage, Henglan Town, Zhongshan City, China

Model identifier: 30925717

Type	of ligh	nt so	urce:
------	---------	-------	-------

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	Connec- tion by wire		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


## **Product parameters**

		Fioduct parai	ileters			
Parameter		Value	Parameter	Value		
	General product parameters:					
<u> </u>	mption in on- 00 h), rounded st integer	15	Energy efficiency class	E		
dicating if it refe a sphere (360º)	s flux (φuse), in- ers to the flux in , in a wide cone arrow cone (90º)	1 687 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 500		
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	15,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00		
Networked standby power (P <sub>net</sub> ) for CLS, expressed in W and rounded to the second decimal		-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80		
Outer dimen-	Height	210	Spectral power dis-	See image		
sions without	Width	110	tribution in the	in last page		
separate con- trol gear, light-	Depth	60	range 250 nm to 800 nm, at full-load			

ing control parts and non-lighting control parts, if any (millimetre)						
Claim of equivalent power <sup>(a)</sup>		-	If yes, equivalent power (W)	-		
			Chromaticity coordinates (x and y)	0,313 0,337		
Parameters for LED and OLED light sources:						
R9 colour rendering index value		1	Survival factor	0,90		
the lumen maintenance factor		0,96				
Parameters for	Parameters for LED and OLED mains light sources:					
displacement fa	ctor (cos φ1)	0,70	Colour consistency in McAdam ellipses	6		
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		_(b)	If yes then replace- ment claim (W)	-		
Flicker metric (P	st LM)	1,0	Stroboscopic effect metric (SVM)	0,9		

(a)<sub>'-'</sub> : not applicable;

(b)<sub>'-'</sub> : not applicable;

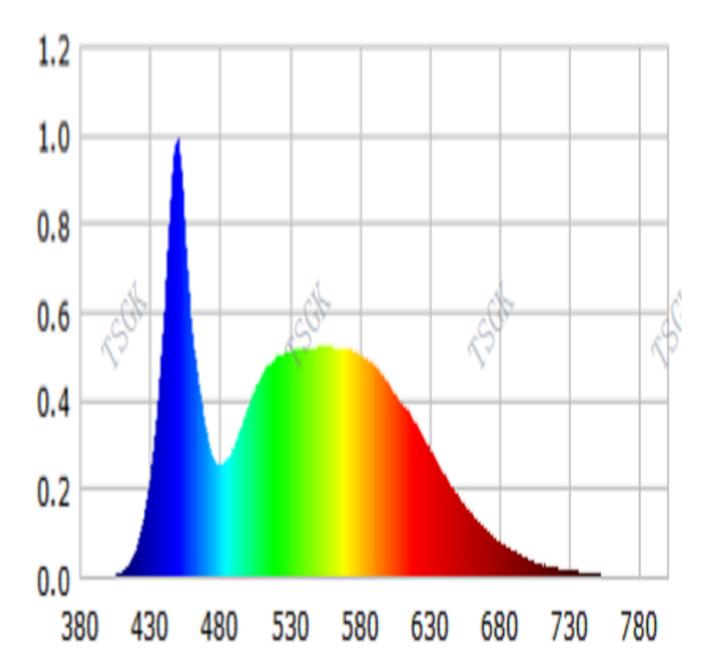

Model placed on the Union market from 27/06/2023



**EPREL registration number:** 1637814 <a href="https://eprel.ec.europa.eu/qr/16">https://eprel.ec.europa.eu/qr/16</a>

37814

Supplier: StoneX Trading (Authorised representative) Website: https://goecolighting.fr/

**Customer care service:** 

Name: Zhongshan Zhaoliang Lighting Co., Ltd. Website:

Email: goecolightingfr@163.com Phone: +447845991423

Address:

7/F, No. 30 Qingji Street, Tiebian Village, Henglan Town, Zhongshan

City, China